


PROFILES



	05	11	17
	65mm	584 x 45 mm	1156 x 45 mm

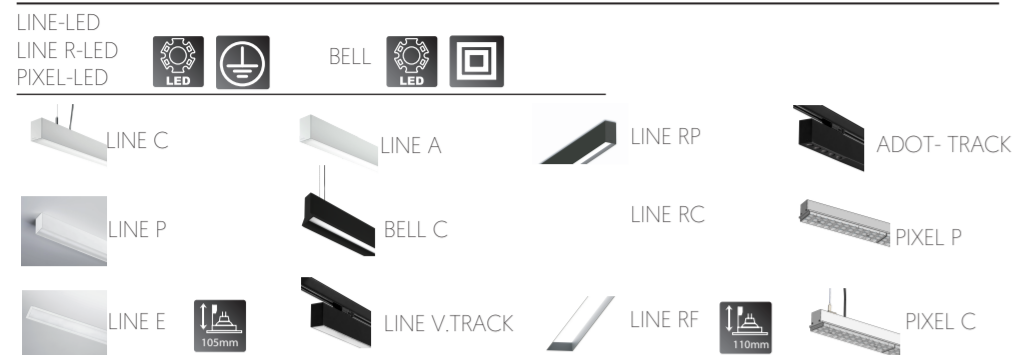

**LINE RF**

Ref.	Length	L x I	Ceiling strip
Line RF 07	770 mm	(L+10)x47	2
Line RF 11	1135 mm	(L+10)x47	2
Line RF 14	1415 mm	(L+10)x47	2
Line RF 18	1835 mm	(L+10)x47	2
Line RF 22	2255 mm	(L+10)x47	3
Line RF 28	2820 mm	(L+10)x47	3

**CONTINUOUS VERSION**  
 Ejemplos de combinaciones / Some examples of combinations.

Ref.	Length	L x I	Joint
Line RF 14 + 18	3240 mm	(L+10)x47	1,5m
Line RF 18 + 18	3660 mm	(L+10)x47	2m
Line RF 18 + 22	4075 mm	(L+10)x47	1,5m
Line RF 14 + 28	4225 mm	(L+10)x47	1,5m
Line RF 18 + 28	4645 mm	(L+10)x47	1,5m
Line RF 22 + 28	5065 mm	(L+10)x47	1,5m
Line RF 28 + 28	5630 mm	(L+10)x47	1,5m

\*Estas composiciones son algunas de las recomendadas, que optimizan componentes / These compositions are some of the recommended ones, which optimize components.

**LINE E**

Ref.	Length	L x I	Ceiling strip
Line E 07	720 mm	(L+10)x42	2
Line E 11	1140 mm	(L+10)x42	2
Line E 14	1420 mm	(L+10)x42	2
Line E 18	1840 mm	(L+10)x42	2
Line E 22	2260 mm	(L+10)x42	3
Line E 28	2825 mm	(L+10)x42	3

**CONTINUOUS VERSION**  
 Ejemplos de combinaciones / Some examples of combinations.

Ref.	Length	L x I	Joint
Line E 14 + 18	3245 mm	3285x42	1,5m
Line E 18 + 18	3665 mm	3705x42	2m
Line E 18 + 22	4080 mm	4125x42	1,5m
Line E 14 + 28	4230 mm	4285x42	1,5m
Line E 18 + 28	4650 mm	4695x42	1,5m
Line E 22 + 28	5070 mm	5105x42	1,5m
Line E 28 + 28	5635 mm	5572 x42	1,5m

\*Estas composiciones son algunas de las recomendadas, que optimizan componentes / These compositions are some of the recommended ones, which optimize components.

**LINE C - LINE RC**

Ref.	Length	Kit Susp.	X	Y
Line C 07	775 mm	A	605	50
Line C 11	1125 mm	A	1025	50
Line C 14	1405 mm	A	1305	50
Line C 18	1825 mm	A	1725	50
Line C 22	2245 mm	A	2145	50
Line C 28	2810 mm	B	2710	50

**CONTINUOUS VERSION**  
 Ejemplos de combinaciones / Some examples of combinations.

Ref.	Length	L x I	Joint
Line C 14 + 18	3230 mm	3230x42	1,5m
Line C 18 + 18	3650 mm	3650x42	2m
Line C 14 + 28	4270 mm	4270x42	1,5m
Line C 18 + 28	4695 mm	4695x42	1,5m
Line C 22 + 28	5120 mm	5120x42	1,5m
Line C 28 + 28	5620 mm	5620x42	1,5m

\*Estas composiciones son algunas de las recomendadas, que optimizan componentes / These compositions are some of the recommended ones, which optimize components.



**1** La fuente de luz de esta luminaria debe reemplazarse únicamente por la empresa Onok.  
 2 The light source of this luminaire should be replaced only by the company Onok.  
 3 Die Lichtquelle dieser Leuchte sollte nur ersetzt werden von der Firma Onok.  
 4 La source lumineuse de ce luminaire doit être remplacée uniquement par la société Onok.  
 5 A fonte de luz desta luminaria só deve ser substituída pela Onok.  
 6 ONOK شركة الاضاءة هو المصدر الوحيد لملامبة هذا المنتج.

**2 DALI/PUSH/10V**  
 1. Mantener el aislamiento reforzado entre la alimentación en baja tensión (BT) y los conductores de control.  
 2. Maintain the insulation reinforced between the low voltage supply (LV) and the control conductors.  
 3. Halten verstärkte Isolierung zwischen der Niederspannungsversorgung (BT) und dem Steuerleiter.  
 4. Maintenir une isolation renforcée entre l'alimentation base tension (BT) et les conducteurs de commande.  
 5. Manter isolamento reforçado entre a alimentação de baixa tensão (BT) e os condutores de control.  
 6. الحفاظ على العزل المعزز بين الخطتين المنخفضة من الجهد والموصلات للتحكم والتوجيه.

**AC-ABC CONDITION**

**NO!!!** **OK**

**Ta: Max.25°**

**1** Si el cable flexible o cordón de esta luminaria está dañado, debe sustituirse exclusivamente por el fabricante para evitar cualquier riesgo.  
 2 If the flexible cable or cord of this luminaire is damaged, you must be replaced exclusively by the manufacturer to avoid any risk.  
 3 Wenn das flexible Kabel oder die Schnur dieser Leuchte beschädigt ist, müssen Sie nur durch den Hersteller ersetzt werden, um zu vermeiden jegliches Risiko.  
 4 Si le câble flexible ou le cordon de ce luminaire est endommagé, vous devez être remplacé exclusivement par le fabricant pour éviter tout risque.  
 5 Se o cabo ou o fio flexível desta luminária estiver danificado, só deve ser substituído exclusivamente pelo fabricante para evitar qualquer risco.  
 6 إذا تم تلف الكابل المرنة أو الحبل من قبل الشركة المنتجة، يجب أن يتم استبدالها حصرياً بالشركة المنتجة.

**LINE INDIVIDUAL**

**Don't touch LED!**

**1** **OFF**

**2**

**3 SURFACE/SUPERFICIE**

**A**

**B**

**APLIQUE/WALL LIGHT**

**3 EMPOTRABLE/RECESSED**

**A** 10mm

**B**

**C**

**D**

**E**

**3 FRAMELESS**

**A**

**B**

**C**

**D**

**3 FRAMELESS**

**A**

**B**

**C**

**D**

**3 FRAMELESS**

**D** **INDIVIDUAL** X:2.5mm

**D** **INI-CEN-FINAL** X:2.5mm

**E**

**F**

**G**

**H**

**H**

**3 Colgante**

**A**

**B**

**Alimentación**

**Tensor**

**Tornillo prisionero**

**CLICK**

**CLICK**

**DIM**

- Blue/Azul: N
- Brown/Marron: L
- Green/Verde: ⊕
- White/Blanco: D-
- Black/Negro: D+

No DIM

**5**

**A**

**B**

**C**

**D**

No DIM

DIM

**5 PENDANT / COLGANTE**

**A** \*Pag 2 LINE y LINE R  
\*\*Pag 2 Bell

**B**

**C** LINE y LINE R

**C** BELL

**D** LINE y LINE R

**E** LINE y LINE R

**E** BELL

**F** LINE y LINE R

**F** BELL

**G** ON

**H** OK!

No mirar directamente la fuente de luz.  
 Do not look directly at the light source.  
 Ne pas regarder directement la source lumineuse.  
 Não olhe diretamente para a fonte de luz.  
 لا تنظر مباشرة إلى مصدر الضوء.

**LINE CONJUNTO**

**INITIAL/INICIAL**

**CENTRAL/CENTRAL**

**FINAL/FINAL**

**2**

**3 SURFACE/SUPERFICIE**

**A**

**B**

**3 SURFACE/SUPERFICIE**

**D**

**C**

**E**

**F**

**3 EMPOTRABLE/RECESSED FRAMELESS**

**A**

**B**

**C**

**D**

FRAMELESS +PAG 3 No.3  
 RECESSED +PAG 2 No.3

