

# OPTIK 1 IP65

## RECESSED

The new IP65 version extends the range of use of the Optik. High luminous efficiency for a homogeneous spot light with protection against water and dust. Available in black and white and with different settings.



**Qualities**

LED
230V
IP65 EXT
IP20 INT
50,000h L90/B10
McAdam C3

**Led Colour**

2.7K
3K
4K
2700K-5000K

**Regulation**

NO DIM
DALI
IGBT TRIAC

**Beam Angle**

15°
40°

**Finish**

Black
White


**Diffuser**

Clear

**Installation**

Recessed

**TEC. DRAWINGS**

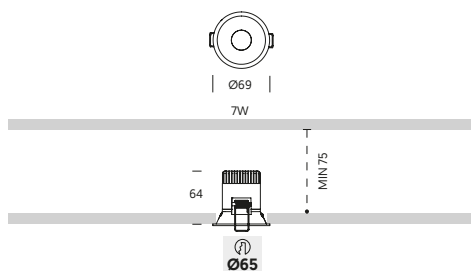

	W	mA	TEMP	LUM	CRI
			2.700K	630	
<b>OPTIK 1 IP65</b>	8W	200	3.000K	766	>90
			4.000K	931	

**REF. CODE**

**CODE BASE**    **Technology**    **Power**    **LED Control**    **LED Colour**    **Beam angle**    **Diffuser**    **Finishes**

OPE1 + A Led + 07 8W + N NoDim + 2 2700K + 1 15° + B Clear + BS Black

D Dali    3 3000K    4 40°    WS White

D Dali TW    4 4000K

C IGBT/TRIAC    8 Tunable White

