


OPTIK II - IP55

RECESSEDS

	W	mA	TEMP	LUM	CRI
8W	8	200	3.000K	766	>90
			4.000K	931	



TEC.DRAWINGS

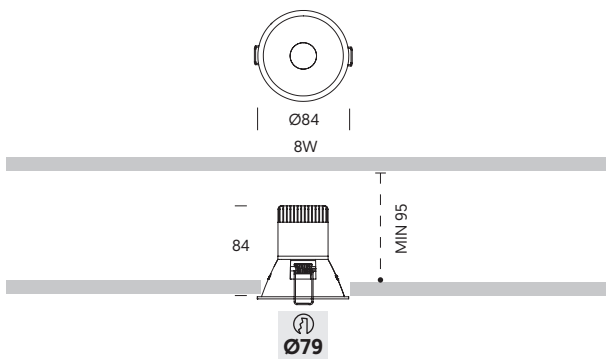

LED □ 230V IP55 EXT IP20 INT L 50.000h L90/B10 McAdam C3
 ≈ 8W > 800lm **OPE2 A 07 . . 4 . .**

BASIC OPTIONS


NO DIM	N	No Dimmable				
3K	3	3000K				
4K	4	4000K				
40° - 50°	4	40° - 50°				
B	B	Clear Difusser				
WS	WS	Satin White	OPE2	A	..	N 3 4 B WS
BS	BS	Satin Black	OPE2	A	..	N 3 4 B BS

CUSTOMIZE OPTIONS

LED CONTROL

DALI	D	Dimmable Dali	OPT2	A	..	D
-------------	----------	---------------	------	---	----	------------------

COMPLEMENT



COPTIK0000000 Lente especial 15°
Special 15° lens