


# LINE R TRACK

## PROFILES



	W	mm	mA	TEMP	LUM	CRI
LINE_07	14	705	250	3.000K	2.325	>90
				4.000K	2.499	
LINE_11	22	1.125	250	3.000K	3.720	>90
				4.000K	3.999	
LINE_14	28	1.405	250	3.000K	4.650	>90
				4.000K	4.998	
LINE_18	35	1.825	250	3.000K	6.045	>90
				4.000K	6.498	
LINE_22	45	2.245	250	3.000K	7.440	>90
				4.000K	7.998	
LINE_28	56	2.810	250	3.000K	9.300	>90
				4.000K	9.997	

## TEC.DRAWINGS

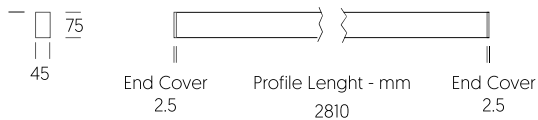

Luminarias compatibles con los siguientes carriles: / The luminaires are compatible with the following rails:  
 NA Globaltrac PRO, Concord, Eutrack 25101, Hoffmeister, IG STD 677, Ivela, Stucchi and Unipro T3.

## DETAIL PHOTO



LED ⊕ 230V IP20 ⌚ 60.000h L80 McAdam C3  
 ≈ 80W > 12.000lm **LNRT A 28** • • **9** • •

## BASIC OPTIONS

<b>NO DIM</b>	<b>N</b>	No Dimmable				
<b>3K</b>	<b>3</b>	3000K				
<b>9</b>	<b>9</b>	120°				
<b>A</b>	<b>A</b>	Ice Difusser				
<b>WS</b>	<b>WS</b>	Satin White	LNRT	A	••	<b>N 3 9 A WS</b>
<b>BS</b>	<b>BS</b>	Satin Black	LNRT	A	••	<b>N 3 9 A BS</b>

## CUSTOMIZE OPTIONS

<b>LED CONTROL</b>						
<b>DALI</b>	<b>D</b>	Dimmable Dali	LNRT	A	••	<b>D</b> • <b>9</b> • •
<b>LED COLOR TEMPERATURE</b>						
<b>4K</b>	<b>4</b>	4000K	LNRT	A	••	• <b>4</b> <b>9</b> • •