


# LINE TRACK

## PROFILES



	W	mm	mA	TEMP	LUM	CRI
LINE_07	14	705	250	3.000K	2.325	>90
				4.000K	2.499	
LINE_11	22	1.125	250	3.000K	3.720	>90
				4.000K	3.999	
LINE_14	28	1.405	250	3.000K	4.650	>90
				4.000K	4.998	
LINE_18	35	1.825	250	3.000K	6.045	>90
				4.000K	6.498	
LINE_22	45	2.245	250	3.000K	7.440	>90
				4.000K	7.998	
LINE_28	56	2.810	250	3.000K	9.300	>90
				4.000K	9.997	

### TEC.DRAWINGS

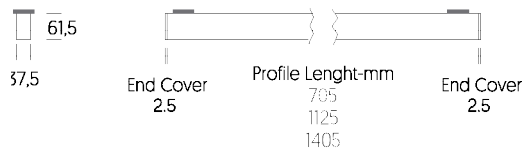

Luminarias compatibles con los siguientes carriles: / The luminaires are compatible with the following rails:  
 NA Globaltrac PRO, Concord, Eutrack 25101, Hoffmeister, IG STD 677, Ivela, Stucchi and Unipro T3.

### DETAIL PHOTO



LED	⊕	230V	IP20	L 60.000h L80	McAdam C3
≈ 14W > 2.000lm	<b>LNET A 07</b>	•	•	<b>9</b>	• •
≈ 22W > 3.000lm	<b>LNET A 11</b>	•	•	<b>9</b>	• •
≈ 28W > 4.000lm	<b>LNET A 14</b>	•	•	<b>9</b>	• •
≈ 36W > 6.000lm	<b>LNET A 18</b>	•	•	<b>9</b>	• •
≈ 45W > 7.000lm	<b>LNET A 22</b>	•	•	<b>9</b>	• •
≈ 56W > 9.000lm	<b>LNET A 28</b>	•	•	<b>9</b>	• •

### BASIC OPTIONS

<b>NO DIM</b>	<b>N</b>	No Dimmable				<b>A WS</b>
<b>3K</b>	<b>3</b>	3000K				<b>A BS</b>
<b>9</b>	<b>9</b>	120°				
<b>A</b>	<b>A</b>	Ice Difusser				
<b>WS</b>	<b>WS</b>	Satin White	LNET	A	••	<b>N 3 9</b>
<b>BS</b>	<b>BS</b>	Satin Black	LNET	A	••	<b>N 3 9</b>

### CUSTOMIZE OPTIONS

<b>LED CONTROL</b>						
<b>DALI</b>	<b>D</b>	Dimmable Dali	LNET	A	••	<b>D • 9</b>
						<b>C ••</b>
<b>LED COLOR TEMPERATURE</b>						
<b>4K</b>	<b>4</b>	4000K	LNET	A	••	<b>• 4 9</b>
<b>LED COMPLEMENTS</b>						
<b>C</b>	<b>C</b>	MicroPrismatic Dif.	LNET	A	••	<b>• • 9</b>