

Modul CLE Quadrant G3 ADV

Modules CLE advanced



For articles manufactured at Tridonic SRB d.o.o.

Product description

- _ Ideal for round shaped and flat ceiling and pendant luminaires
- _ THE solution to realise XXL luminaires
- _ For uniform illumination of prestige areas or rooms designed to impress
- _ High Output and High Efficiency Mode enables more flexibility on luminaire design
- _ Narrow diffuser distances possible
- _ Self-cooling (no additional heat sink required)
- _ HE ... High Efficiency, NM ... Nominal Mode, HO ... High Output
- _ Long lifetime up to 72,000 hours
- _ 5 years guarantee (conditions at <https://www.tridonic.com/manufacturer-guarantee-conditions>)

Optical properties

- _ Colour temperatures 3,000 and 4,000 K
- _ Useful luminous flux 2,586 lm at Irated and tp = 25 °C
- _ Efficacy of the LED module 193 lm/W at Irated and tp = 25 °C
- _ High colour rendering index CRI > 80
- _ Small colour tolerance (MacAdam 3) ^①
- _ Small luminous flux tolerances

Mechanical properties

- _ Module dimension ø522 mm, ø802 mm und ø1,082 mm with several module segments
- _ Simple installation (e.g. screws)


System solution

- _ Combine Tridonic's LED modules and dimmable drivers to achieve an outstanding system efficacy (configuration possible via <https://setbuilder.tridonic.com/>)

^① Integral measurement over the complete module.

Website

<http://www.tridonic.com/89603016>

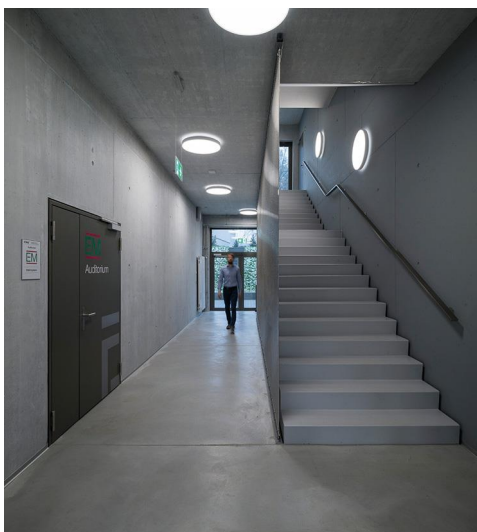

Spotlights



Downlights



Linear



Area



Floor | Wall



Free-standing



Street




Decorative




High bay

Modul CLE Quadrant G3 ADV


Modules CLE advanced

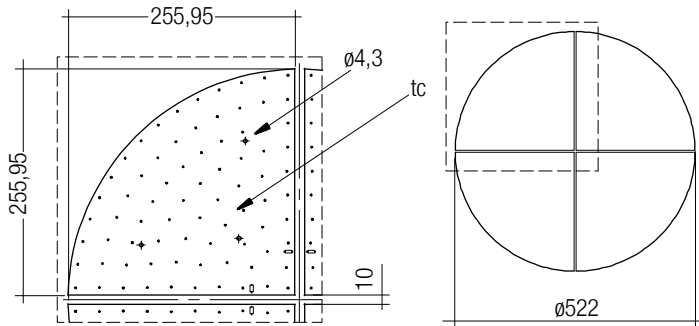

CLE Quadrant G3 261mm 1200lm ADV (details see 3.4 Mounting instructions)

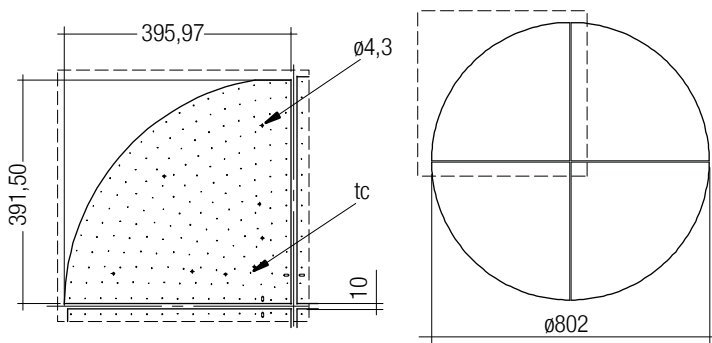

CLE Quadrant G3 401mm 2500lm ADV (details see 3.4 Mounting instructions)

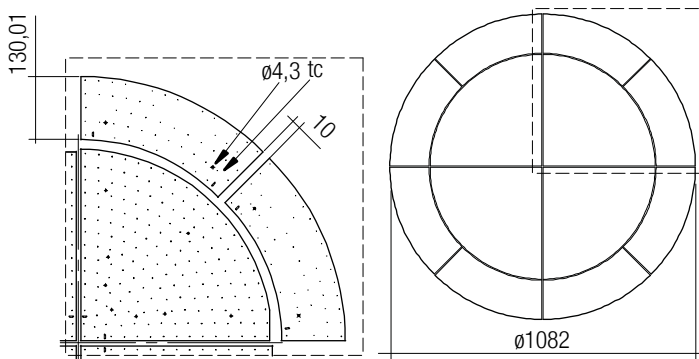

CLE Quadrant G3 401mm 2500lm ADV + CLE Quadrant G3 541mm 1000lm ADV (details see 3.4 Mounting instructions)

Ordering data

Type	Article number	Colour temperature	Packaging, carton	Weight per pc.
CLE Quadrant G3 261mm 1200lm 830 ADV	89603016	3,000 K	80 pc(s).	0.134 kg
CLE Quadrant G3 261mm 1200lm 840 ADV	89603017	4,000 K	80 pc(s).	0.134 kg
CLE Quadrant G3 401mm 2500lm 830 ADV	89603018	3,000 K	20 pc(s).	0.400 kg
CLE Quadrant G3 401mm 2500lm 840 ADV	89603019	4,000 K	20 pc(s).	0.400 kg
CLE Quadrant G3 541mm 1000lm 830 ADV	89603020	3,000 K	40 pc(s).	0.146 kg
CLE Quadrant G3 541mm 1000lm 840 ADV	89603021	4,000 K	40 pc(s).	0.146 kg

Technical data

Beam characteristic	120°
Ambient temperature t_a	-25 ... +45 °C
t_p rated	45 °C
t_c	85 °C
Irated for CLE Quadrant G3 261mm	225 mA
Irated for CLE Quadrant G3 401mm	450 mA
Irated for CLE Quadrant G3 541mm	250 mA
I _{max} for CLE Quadrant G3 261mm	1,200 mA
I _{max} for CLE Quadrant G3 401mm	2,800 mA
I _{max} for CLE Quadrant G3 541mm	1,400 mA
Max. permissible LF current ripple for CLE Quadrant G2 261mm	1,320 mA
Max. permissible LF current ripple for CLE Quadrant G2 401mm	3,080 mA
Max. permissible LF current ripple for CLE Quadrant G2 541mm	1,540 mA
Max. permissible peak current for CLE Quadrant G2 261mm	1,680 mA / max. 10 ms
Max. permissible peak current for CLE Quadrant G2 401mm	3,840 mA / max. 10 ms
Max. permissible peak current for CLE Quadrant G2 541mm	1,920 mA / max. 10 ms
Max. working voltage for insulation ^②	300 V
Insulation test voltage	1.6 kV
CTI of the printed circuit board	≥ 600
ESD classification	Severity level 4
Risk group (IEC 62471) ^③	RG1
Classification acc. to IEC 62031	Built-in
Type of protection	IP00
Lumen maintenance L70B50	72,000 h
Guarantee (conditions at www.tridonic.com)	5 Year(s)

Approval marks



Standards

IEC 62031, IEC 62471, IEC 61547, IEC 55015, IEC 61000-4-2

Specific technical data

Type	Article number	Photometric code	Useful luminous flux at $t_p = 25\text{ °C}$ ^④	Expected luminous flux at t_p rated ^⑤	Typ. forward current	Min. forward voltage at t_p rated	Max. forward voltage at $t_p = 25\text{ °C}$	Power consumption P_{on} at $t_p = 25\text{ °C}$	Efficacy of the module at $t_p = 25\text{ °C}$	Expected efficacy of the module at t_p rated	Colour rendering index CRI
Operating mode HE											
CLE Quadrant G3 261mm 1200lm 830 ADV	89603016	830/359	1,244 lm	1,215 lm	225 mA	28.9 V	31.4 V	6.87 W	183 lm/W	181 lm/W	>80
CLE Quadrant G3 261mm 1200lm 840 ADV	89603017	840/359	1,281 lm	1,253 lm	225 mA	28.9 V	31.4 V	6.80 W	188 lm/W	186 lm/W	>80
CLE Quadrant G3 401mm 2500lm 830 ADV	89603018	830/359	2,442 lm	2,385 lm	450 mA	28.6 V	31.2 V	13.40 W	182 lm/W	180 lm/W	>80
CLE Quadrant G3 401mm 2500lm 840 ADV	89603019	840/359	2,586 lm	2,529 lm	450 mA	28.6 V	31.2 V	13.40 W	193 lm/W	191 lm/W	>80
CLE Quadrant G3 541mm 1000lm 830 ADV	89603020	830/359	1,003 lm	974 lm	250 mA	21.0 V	22.8 V	5.40 W	186 lm/W	183 lm/W	>80
CLE Quadrant G3 541mm 1000lm 840 ADV	89603021	840/359	1,039 lm	1,020 lm	250 mA	21.0 V	22.8 V	5.40 W	192 lm/W	191 lm/W	>80
Operating mode HO											
CLE Quadrant G3 261mm 1200lm 830 ADV	89603016	830/359	-	1,837 lm	350 mA	29.7 V	32.3 V	-	-	170 lm/W	>80
CLE Quadrant G3 261mm 1200lm 840 ADV	89603017	840/359	-	1,888 lm	350 mA	29.7 V	32.3 V	-	-	175 lm/W	>80
CLE Quadrant G3 401mm 2500lm 830 ADV	89603018	830/359	-	3,720 lm	725 mA	29.5 V	32.1 V	-	-	170 lm/W	>80
CLE Quadrant G3 401mm 2500lm 840 ADV	89603019	840/359	-	3,946 lm	725 mA	29.5 V	32.1 V	-	-	180 lm/W	>80
CLE Quadrant G3 541mm 1000lm 830 ADV	89603020	830/359	-	1,427 lm	375 mA	21.5 V	23.4 V	-	-	174 lm/W	>80
CLE Quadrant G3 541mm 1000lm 840 ADV	89603021	840/359	-	1,487 lm	375 mA	21.5 V	23.4 V	-	-	181 lm/W	>80

② If mounted with M4 screws.

③ Measured at operating mode HO.

④ Tolerance of useful light flux - 0 % / + 15 %. Measurement uncertainty ± 10 %.

⑤ Tolerance of expected light flux - 0 % / + 15 %. Measurement uncertainty ± 10 %. Based on calculation.

⑥ Tolerance of power consumption P_{on} ± 10 %. Measurement uncertainty ± 5 %.

1. Standards

IEC 62031
IEC 62471
IEC 62778
IEC 61547
IEC 61000-4-2

1.1 Photometric code

Key for photometric code, e. g. 830 / 449

1 st digit	2 nd + 3 rd digit	4 th digit	5 th digit	6 th digit
Code CRI	Colour temperature in Kelvin x 100	MacAdam initial	MacAdam after 25% of the lifetime (max.6000h)	Luminous flux after 25% of the lifetime (max.6000h)
7 70 – 79				Code Luminous flux
8 80 – 89				7 ≥ 70 %
9 ≥90				8 ≥ 80 % 9 ≥ 90 %

1.2 Energy classification

Type	Colour temperature	Forward current	Energy classification	Energy consumption
CLE Quadrant G3 261mm 1200lm 830 ADV	3,000 K	225 mA	C	7 kWh / 1,000 h
CLE Quadrant G3 261mm 1200lm 840 ADV	4,000 K	225 mA	C	7 kWh / 1,000 h
CLE Quadrant G3 401mm 2500lm 830 ADV	3,000 K	450 mA	C	14 kWh / 1,000 h
CLE Quadrant G3 401mm 2500lm 840 ADV	4,000 K	450 mA	C	14 kWh / 1,000 h
CLE Quadrant G3 541mm 1000lm 830 ADV	3,000 K	250 mA	C	6 kWh / 1,000 h
CLE Quadrant G3 541mm 1000lm 840 ADV	4,000 K	250 mA	C	6 kWh / 1,000 h

Energy label and further information at www.tridonic.com in the certificates tab of the corresponding product page and at the EPREL data base <https://eprel.ec.europa.eu/>

2. Thermal details

2.1 tc point, ambient temperature and lifetime

The temperature at tp reference point is crucial for the light output and lifetime of a LED product.

For CLE a tp temperature of 45 °C has to be complied in order to achieve an optimum between heat sink requirements, light output and lifetime.

Compliance with the maximum permissible reference temperature at the tc point must be checked under operating conditions in a thermally stable state. The maximum value must be determined under worst-case conditions for the relevant application.

The tc and tp temperature of LED modules from Tridonic are measured at the same reference point.

2.2 Storage and humidity

Storage temperature	-30 ... +80 °C
---------------------	----------------

Operation only in non condensing environment.

Humidity during processing of the module should be between 30 to 70 %.

2.3 Thermal design and heat sink

The rated life of LED products depends to a large extent on the temperature. If the permissible temperature limits are exceeded, the life of the CLE will be greatly reduced or the CLE may be destroyed.

3. Installation / wiring

3.1 Electrical supply/choice of LED driver

CLE from Tridonic are not protected against overvoltages, overcurrents, overloads or short-circuit currents. Safe and reliable operation can only be guaranteed in conjunction with a LED driver which complies with the relevant standards. The use of LED driver from Tridonic in combination with CLE guarantees the necessary protection for safe and reliable operation.

If a LED driver other than Tridonic is used, it must provide the following protection:

- Short-circuit protection
- Overload protection
- Overtemperature protection



CLE must be supplied by a constant current LED driver. Operation with a constant voltage LED driver will lead to an irreversible damage of the module.

Wrong polarity can damage the CLE.

With parallel wiring tolerance-related differences in output are possible (thermal stress of the module) and can cause differences in brightness. If one module fails, the remaining modules may be overloaded.

CLE can be operated either from SELV LED drivers or from LED drivers with LV output voltage.




CLE are basic insulated up to 300 V against ground and can be mounted directly on earthed metal parts of the luminaire. If the max. output voltage of the led Driver (also against earth) is above 300 V, an additional insulation between LED module and heat sink is required (for example by insulated thermal pads) or by a suitable luminaire construction.


At voltages > 60 V an additional protection against direct touch (test finger) to the light emitting side of the module has to be guaranteed. This is typically achieved by means of a non removable light distributor over the module.

3.2 Wiring


CLE Quadrant G3 261mm 1200 lm ADV

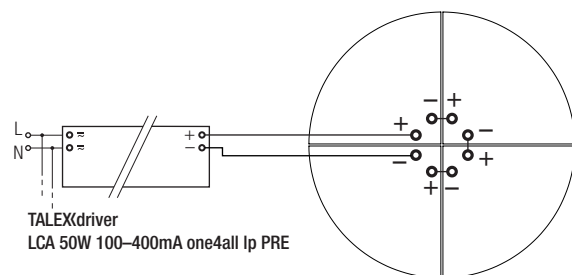

CLE Quadrant G3 401mm 2500lm ADV

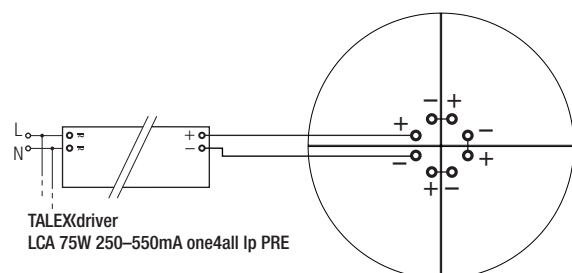


CLE Quadrant G3 401mm 2500lm ADV +
 CLE Quadrant G3 541mm 1000lm ADV

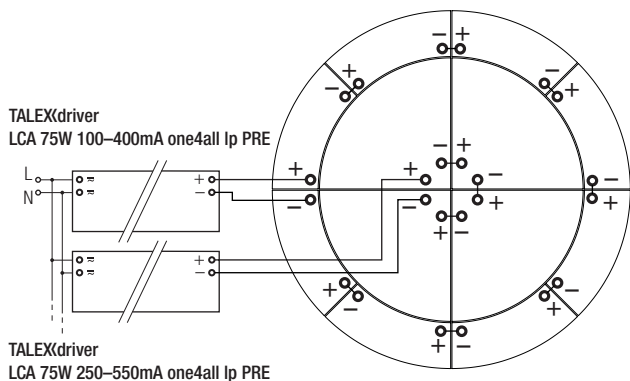

3.3 Wiring type and cross section

For wiring use solid wire from 0.14 to 0.5 mm².
 No reconnection with smaller diameters possible if used with >0.34 mm².

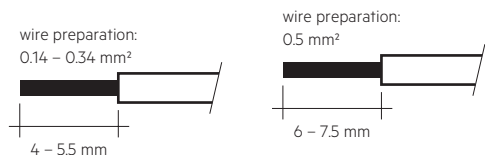

To remove the wires use a suitabel tool (Wago 206-859) or through twist and pull.

3.4 Mounting instruction

! None of the components of the CLE (substrate, LED, electronic components etc.) may be exposed to tensile or compressive stresses.

Max. torque for fixing: 0.5 Nm.


The LED modules are mounted with 4 screws per module. In order not to damage the modules only rounded head screws and an additional plastic flat washer should be used.

! Chemical substance may harm the LED module. Chemical reactions could lead to colour shift, reduced luminous flux or a total failure of the module caused by corrosion of electrical connections.


Materials which are used in LED applications (e.g. sealings, adhesives) must not produce dissolver gas. They must not be condensation curing based, acetate curing based or contain sulfur, chlorine or phthalate.

Avoid corrosive atmosphere during usage and storage.


CLE Quadrant G3 261mm 1200 lm ADV

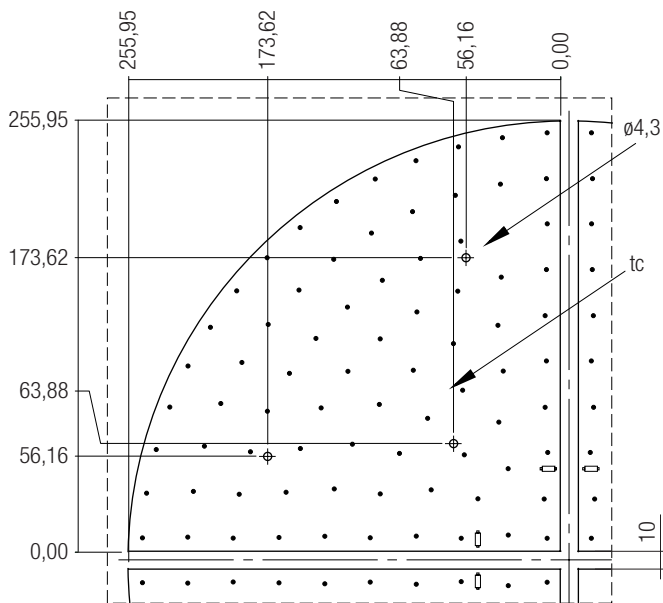

CLE Quadrant G3 401mm 2500lm ADV

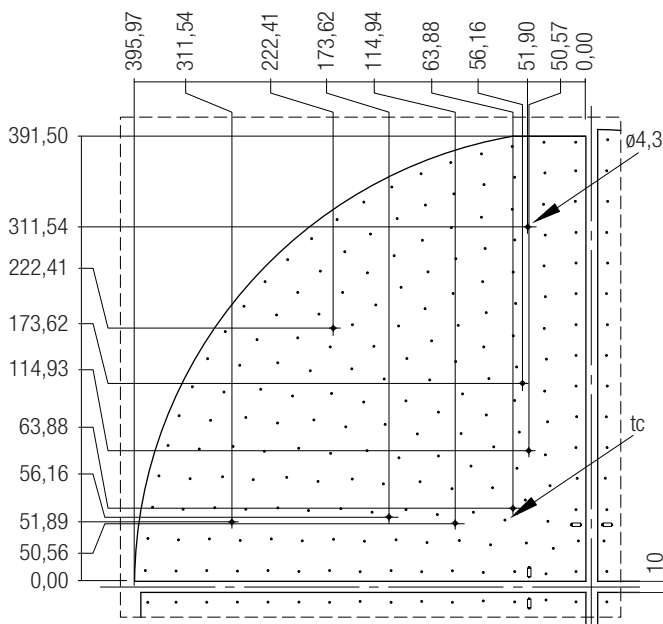

CLE Quadrant G3 541mm 1000lm ADV

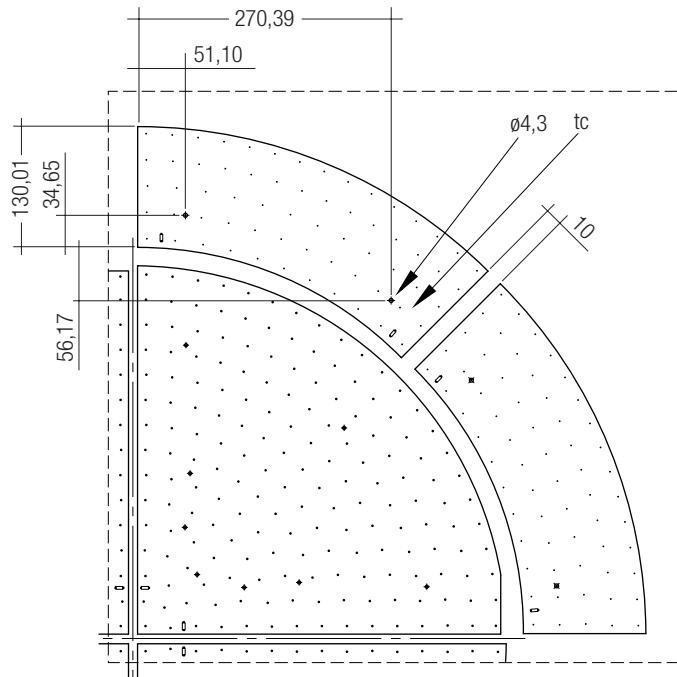

3.5 EOS/ESD safety guidelines



The device / module contains components that are sensitive to electrostatic discharge and may only be installed in the factory and on site if appropriate EOS/ESD protection measures have been taken. No special measures need be taken for devices/modules with enclosed casings (contact with the pc board not possible), just normal installation practice. Please note the requirements set out in the document EOS / ESD guidelines (Guideline_EOS_ESD.pdf) at: <http://www.tridonic.com/esd-protection>

4. Lifetime

4.1 Lifetime, lumen maintenance and failure rate

The light output of an LED module decreases over the lifetime, this is characterized with the L value.

L70 means that the LED module will give 70 % of its initial luminous flux. This value is always related to the number of operation hours and therefore defines the lifetime of an LED module.

As the L value is a statistical value and the lumen maintenance may vary over the delivered LED modules.

The B value defines the amount of modules which are below the specific L value, e.g. L70B10 means 10 % of the LED modules are below 70 % of the initial luminous flux, respectively 90 % will be above 70 % of the initial value. In addition the percentage of failed modules (fatal failure) is characterized by the C value.

The F value is the combination of the B and C value. That means for F degradation and complete failures are considered, e.g. L70F10 means 10 % of the LED modules may fail or be below 70 % of the initial luminous flux.

4.2 Lumen maintenance for CLE

CLE Quadrant G3 261mm 1200lm 8x0 ADV

Forward current	tp temperature	L90 / F10	L90 / F50	L80 / F10	L80 / F50	L70 / F10	L70 / F50
225 mA	45 °C	>72k h	>72k h	>72k h	>72k h	>72k h	>72k h
	55 °C	>72k h	>72k h	>72k h	>72k h	>72k h	>72k h
	65 °C	>72k h	>72k h	>72k h	>72k h	>72k h	>72k h
350 mA	45 °C	>72k h	>72k h	>72k h	>72k h	>72k h	>72k h
	55 °C	>72k h	>72k h	>72k h	>72k h	>72k h	>72k h
	65 °C	>72k h	>72k h	>72k h	>72k h	>72k h	>72k h

CLE Quadrant G3 401mm 2500lm 8x0 ADV

Forward current	tp temperature	L90 / F10	L90 / F50	L80 / F10	L80 / F50	L70 / F10	L70 / F50
450 mA	45 °C	>72k h	>72k h	>72k h	>72k h	>72k h	>72k h
	55 °C	>72k h	>72k h	>72k h	>72k h	>72k h	>72k h
	65 °C	>72k h	>72k h	>72k h	>72k h	>72k h	>72k h
725 mA	45 °C	>72k h	>72k h	>72k h	>72k h	>72k h	>72k h
	55 °C	>72k h	>72k h	>72k h	>72k h	>72k h	>72k h
	65 °C	>72k h	>72k h	>72k h	>72k h	>72k h	>72k h


CLE Quadrant G3 541mm 1000lm 8x0 ADV

Forward current	tp temperature	L90 / F10	L90 / F50	L80 / F10	L80 / F50	L70 / F10	L70 / F50
250 mA	45 °C	>72k h	>72k h	>72k h	>72k h	>72k h	>72k h
	55 °C	>72k h	>72k h	>72k h	>72k h	>72k h	>72k h
	65 °C	>72k h	>72k h	>72k h	>72k h	>72k h	>72k h
375 mA	45 °C	>72k h	>72k h	>72k h	>72k h	>72k h	>72k h
	55 °C	>72k h	>72k h	>72k h	>72k h	>72k h	>72k h
	65 °C	>72k h	>72k h	>72k h	>72k h	>72k h	>72k h


5. Electrical values

5.1 Typ. forward voltage vs. forward current


CLE Quadrant G3 261mm 1200lm

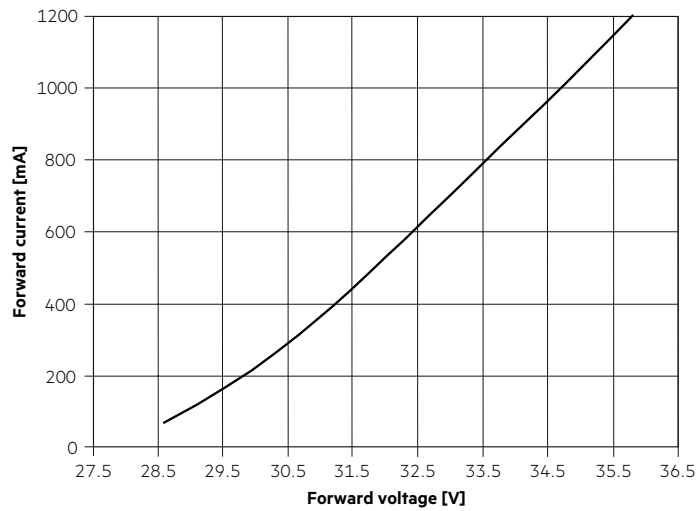


CLE Quadrant G3 401mm 2500lm

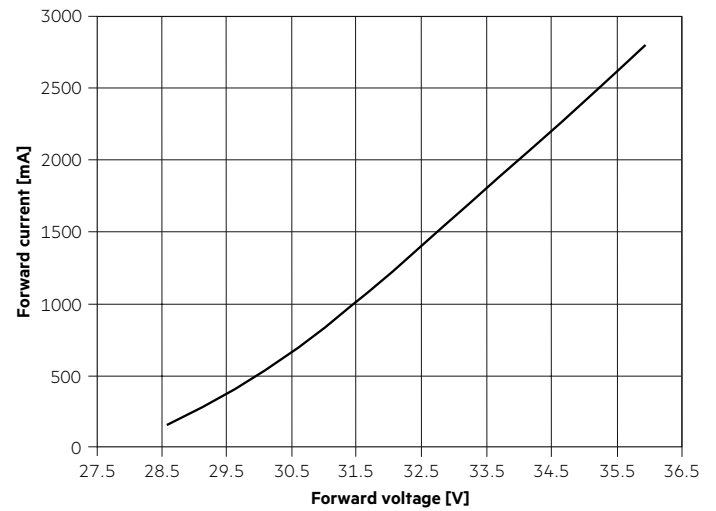

CLE Quadrant G3 541mm 1000lm

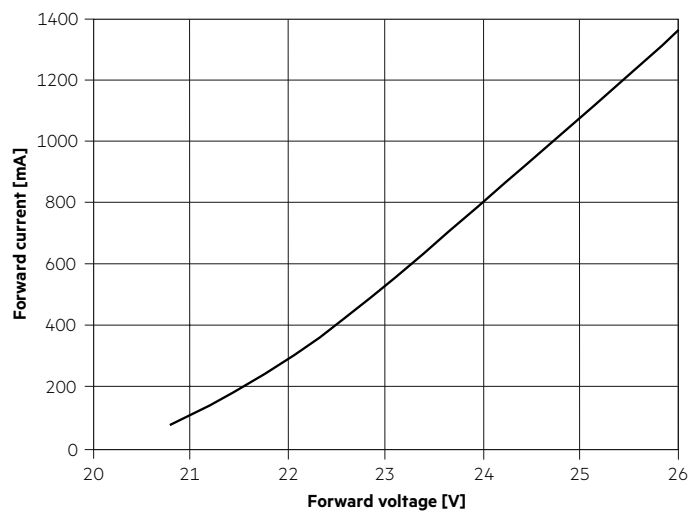

5.2 Forward voltage vs. tp temperature

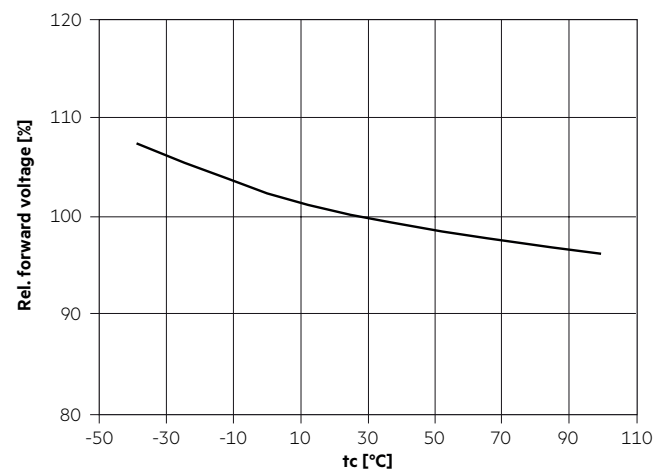

The diagrams are based on statistic values.
The real values can be different.

6. Photometric characteristics

6.1 Coordinates and tolerances according to CIE 1931

The specified colour coordinates are measured integral after a settling time of 100 ms. The current impuls depends on the module type.


The ambient temperature of the measurement is $t_a = 25^\circ\text{C}$.

The measurement tolerance of the colour coordinates are ± 0.01 .


Module type	Current impuls
CLE Quadrant G3 261mm 1200lm 8x0 ADV	225 mA
CLE Quadrant G3 401mm 1200lm 8x0 ADV	450 mA
CLE Quadrant G3 541mm 1200lm 8x0 ADV	250 mA

3,000 K

	x0	y0
Centre	0.4338	0.4030

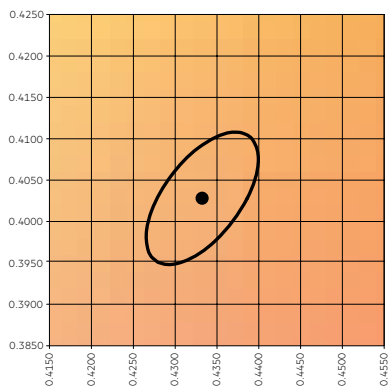


— MacAdam Ellipse: 3SDCM

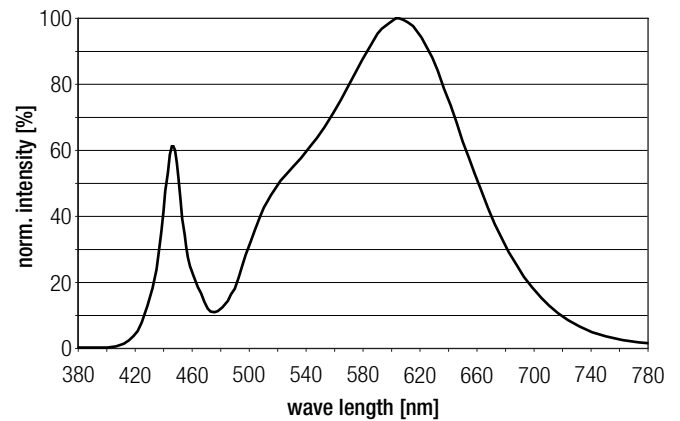


4,000 K

	x0	y0
Centre	0.3818	0.3797

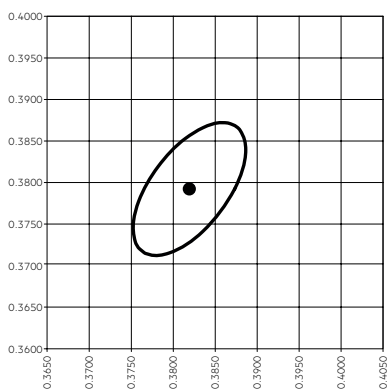


— MacAdam Ellipse: 3SDCM

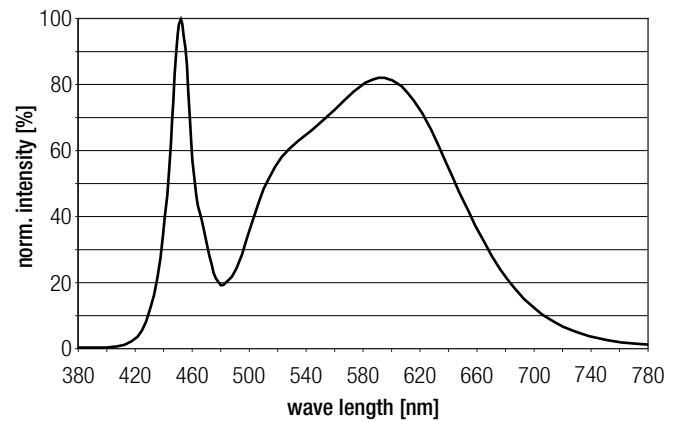


6.2 Light distribution

The optical design of the STARK QLE product line ensures optimum homogeneity for the light distribution.

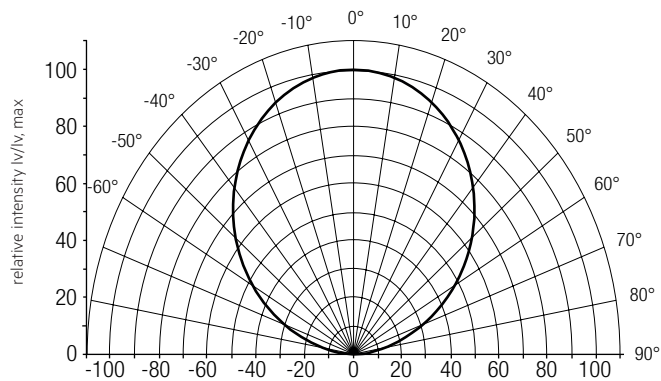


The colour temperature is measured over the complete module. The single LED light points can be outside of 3SDCM. To ensure an ideal mixture of colours and a homogeneous light distribution a suitable optic (e. g. PMMA diffuser) and a sufficient spacing between module and optic (typ. 7 cm) should be used.

6.3 Relative luminous flux vs. tc temperature

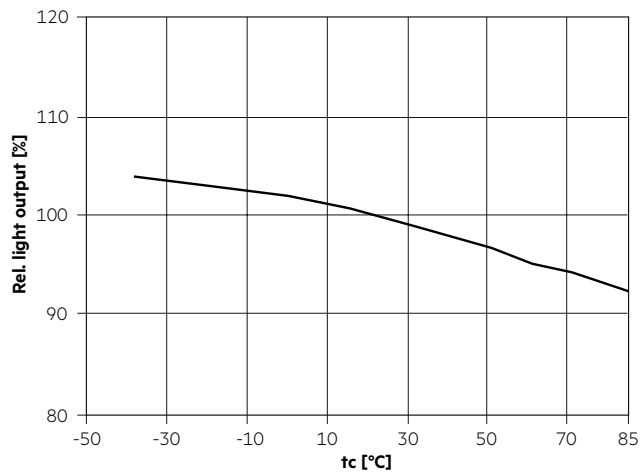


6.4 Relative luminous flux vs. operating current


CLE Quadrant G3 261mm 1200lm 8x0 ADV

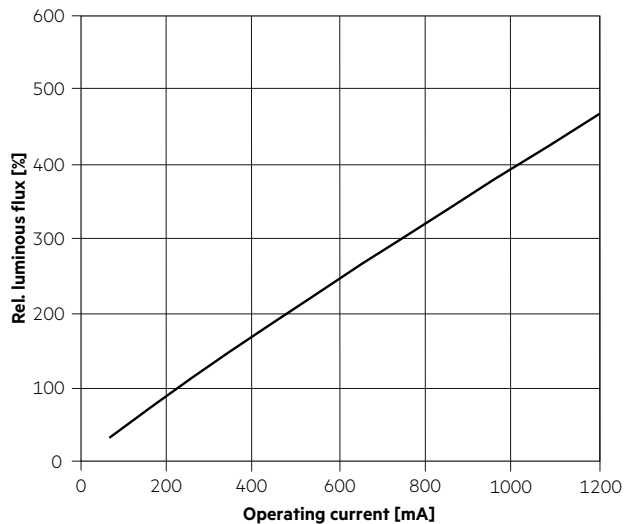

CLE Quadrant G3 401mm 2500lm 8x0 ADV

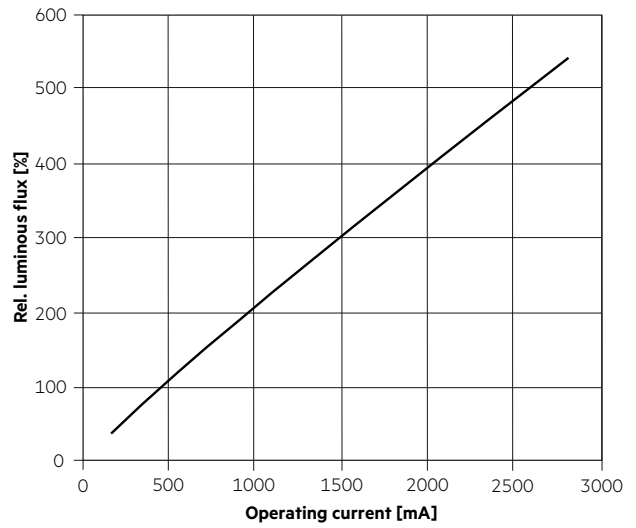

CLE Quadrant G3 541mm 1000lm 8x0 ADV

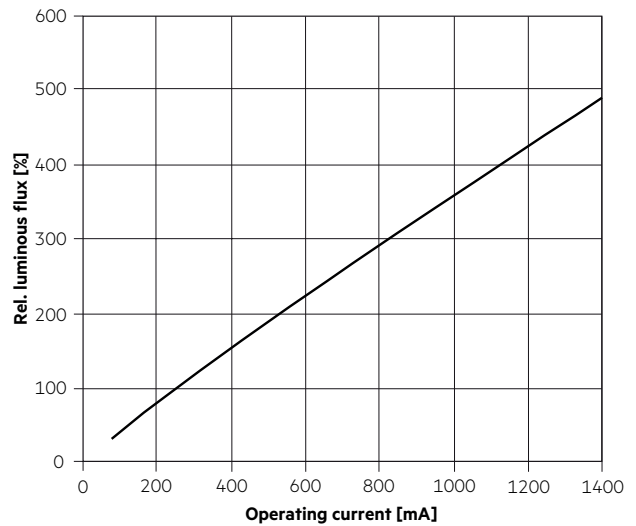

7. Miscellaneous

7.1 Additional information

Additional technical information at www.tridonic.com → Technical Data

Guarantee conditions at www.tridonic.com → Services

Lifetime declarations are informative and represent no warranty claim.