

# Economic LED Power Supply



## CC Version




**IP66**

### Reliable Technical Data

- Rated Input Voltage: 100-240VAC
- Input Frequency: 50/60Hz
- Output Power: 4W
- Body: PC By Waterproof Grade IP66
- Open Circuit; Short Circuit; Over Load;
- Over Heat Protection
- Safety According to EN61347-1, EN61347-2-13
- EMI According to EN55015
- EMF According to EN62493-2010
- EMS According to EN61000-3-2; EN61000-3-3; EN61547
- Approbation Mark: CE ROHS; TUV; C-Tick

### Dimension in mm

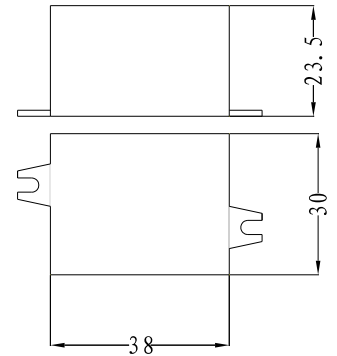

### Characteristics

Rated input voltage: AC200-240V 50Hz (power factor measured at AC230V and full load)

Model No.	Constant output Current	Load	Max output Voltage	PF	Ta	Tc	L×W×H	Approval
SNP4-350ILP	350mA	1-4W	12VDC	≥0.4	45°C	80°C	38X30X23.5	TUV
SNP4-500ILP	500mA	1.5-4.5W	9.5VDC	≥0.4	45°C	80°C	38X30X23.5	TUV
SNP4-700ILP	700mA	1-4W	6VDC	≥0.4	45°C	85°C	38X30X23.5	TUV