BALO 150
wiring system

With a diameter of 150 mm, Balo 150 is designed to stand out in any space. Made of aluminium with a matt black finish, this LED luminaire offers a sleek and contemporary design. Ideal for large areas or to become the focal point of the room. For added convenience and intelligent control, choose DALI or CASAMBI dimming when selecting the canopy.

*You can customise the finish by contacting us.

Qualities

LED | 230V | IP20 | 50.000h | McAdam C3 | CE | 850°

Led Colour

2.7K | 3K

Regulation

NO DIM | DALI

Beam Angle

>90°

Finish

Diffuser

Installation

TEC. DRAWINGS

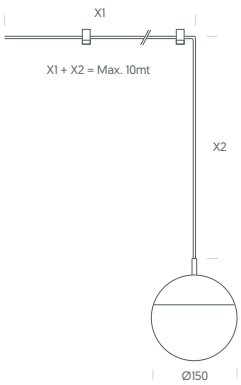

	W	mA	TEMP	LUM	CRI
BALO 150	4.2W	500mA	2.700K	505	>80
			3.000K	535	

REF. CODE

CODE BASE	Technology	Power	LED Control	LED Colour	Beam angle	Installation	Finishes
BSP3	A Led	150 Ø150/6W	X NoDriver	2 2700K / 3 3000K	9 >90°	P Pendant	BS Black

ACCESORIES

TENSOR*
BSTN



CANOPY
WSFLA20_XXSBS - Máx. 4 luminarias
WSFLA40_XXSBS - Máx. 8 luminarias
WSFLA60_XXSBS - Máx. 12 luminarias

*Each luminaire includes 2 units.





Polígono industrial B, Parcela 3
46800 Xàtiva, Valencia (España)
T. +34 962 259 020
onok@onok.es www.onoklighting.com

3 Year Guarantee* UPGRADEABLE TO 5 UNDER SPECIAL GUARANTEE CONDITIONS