



# MICRO 24V

INDIVIDUAL - SYSTEM



## SPECIFICATIONS

Qualities



Led Colour



Regulation



Beam Angle



Finish



Diffuser




Installation




## LIGHT SOURCE

	W	V	TEMP	LUM	CRI
MICRO 1M	21W	24V	3.000K	2.100	>90
			4.000K	2.450	
MICRO 1,5M	32W	24V	3.000K	3.150	>90
			4.000K	3.675	
MICRO 2M	42W	24V	3.000K	4.200	>90
			4.000K	4.900	
MICRO 2,5M	53W	24V	3.000K	5.250	>90
			4.000K	6.125	

## TECHNICAL DRAWINGS

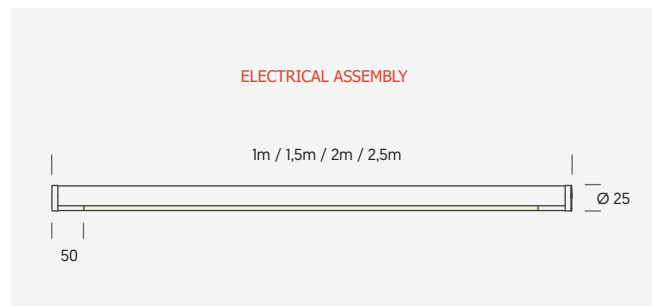

## REFERENCE CODE - INDIVIDUAL

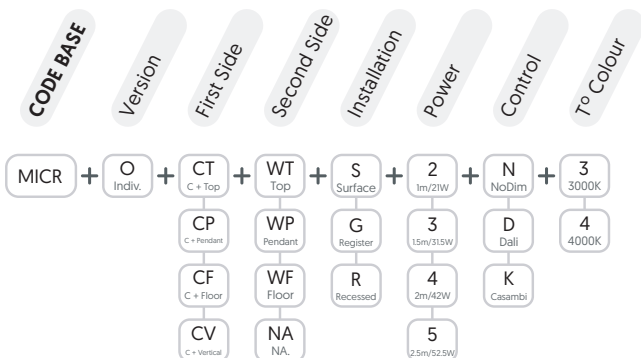

## REFERENCE CODE - SYSTEM

