

OPTIK 1 IP65

RECESSED

The new IP65 version extends the range of use of the Optik. High luminous efficiency for a homogeneous spot light with protection against water and dust. Available in black and white and with different settings.



Qualities

LED
 230V
 IP65 EXT
 IP20 INT
 50,000h L90/B10
 McAdam C3

Led Colour

2.7K
 3K
 4K
 2700K-6000K

Regulation

NO DIM
 DALI
 IGBT TRIAC

Beam Angle

40°

Finish

Black
 White


Diffuser

Clear

Installation

Recessed

TEC. DRAWINGS

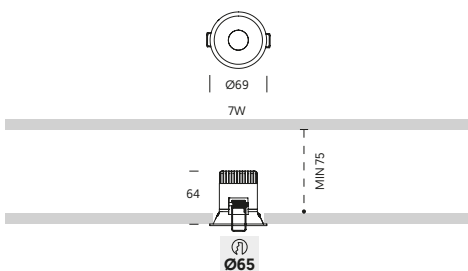

| | W | mA | TEMP | LUM | CRI |
|---------------------|----|-----|--------|-----|-----|
| OPTIK 1 IP65 | 8W | 200 | 2.700K | 630 | >90 |
| | | | 3.000K | 766 | |
| | | | 4.000K | 931 | |

REF. CODE

CODE BASE **Technology** **Power** **LED Control** **LED Colour** **Beam angle** **Diffuser** **Finishes**

OPE1 + A Led + 07 8W + N NoDim + 2 2700K + 4 40° + B Clear + BS Black

D Dali 3 3000K WS White

D Dali TW 4 4000K

C IGBT/TRIAC 8 Tunable White

ACCESSORIES



COPTIK0000000
Special 15° lens

