

# TIRA LED DIGITAL 14.4W

Compatible with DMX512 [1990] protocol. Adopting RS485 signal trunk and signal differential transmission mode to ensure stronger ability of anti-interference and longer transmission distance. Automatically addressing with editor

**Qualities**

LED IP20 60LED/m

**Led Colour**




**Regulation**



**Beam Angle**



**TEC. DRAWINGS**

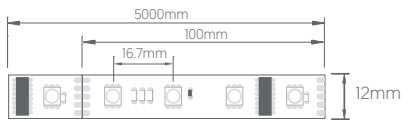

	W	VOLTAGE	TEMP	LUM	CRI
<b>Tira LED Digital 14.4W</b>	14.4W	24V	RGB+W	718	-

**REF. CODE**

**CODE BASE** | Technology | Power | LED Control | LED Colour | Beam angle | Diffuser | IP  
 TLDT + A Led + 14.4W + N NoAplica + 9 RGBW + 9 >90° + X NoDiffuser + 20 IP20

**ACCESSORIES**

