

# KUSKA

BY SINGULAR LIGHTING

Kuska is a flexible system that combines acoustic modules, with and without light. The modules join together to form linear compositions of various tones that absorb noise and provide adaptable lighting to meet the needs of each sector.

Kuska combines acoustic and luminous comfort in a unique solution, transforming workspaces into more comfortable and functional environments.

**Qualities**

LED 230V IP20 60.000h L80 McAdam C3

**Led Colour**

3K 4K

**Regulation**

NO DIM DALI

**Beam Angle**

>90° icon"/> >90°


**Finish**

**Diffuser**

**Installation**



**TEC. DRAWINGS**

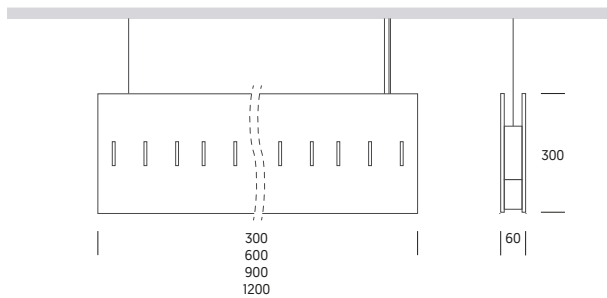

	W	mA	TEMP	LUM	CRI
<b>KUSKA</b>	6.7	350	3.000K	1050	>90
			4.000K	1095	
	13.4	350	3.000K	2100	
			4.000K	2190	
	20.1	350	3.000K	3150	
			4.000K	3285	
	26.8	350	3.000K	4200	
			4.000K	4380	

**REF. CODE**


**CODE BASE** **Technology** **Power** **LED Control** **LED Colour** **Installation** **Acoustic Finish** **Finishes**

KSKA + A Led + 06 6.7W + N NoDim + 3 3000K + S Surface + C Cream + BS Black

X NoLED 13 13.4W D Dali 4 4000K R Recessed B Beige XX NoLED

20 20.1W B BluZlight X NoLED P Pendant A Antracite

26 26.8W X NoLED P Pearl

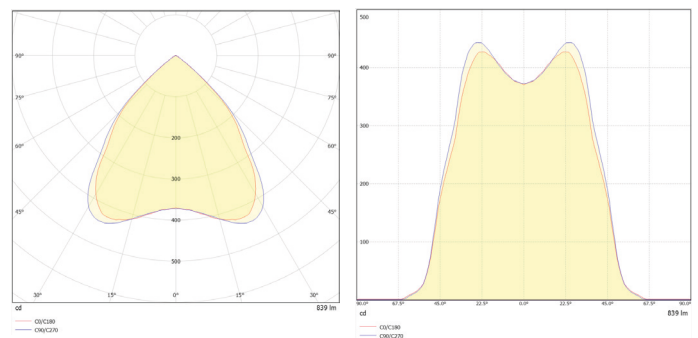

**COMPOSITION**  
100% PET  
min. 60% Recycled

**ENVIRONMENT**  
Recyclable, low VOC content, REACH

**SOUND ABSORPTION**  
No air chamber  
to  $\alpha_{av} = 0.5$  NRC = 0.7  
Air chamber 200 mm  
to  $\alpha_{av} = 1.1$  NRC = 0.95

**FIRE RESISTANCE**  
EN 13501-1+A1: B-s2, d0

Each m<sup>2</sup> contains 75 recycled PET bottles